

CYCLE- VER02

01-04-2011

EPOXY COATING

Coating cycle, based on a colored water-based dispersion particularly suitable on concrete floors.

Preparation of the surface

Old substrates will have to be solid, dry, flat, absorbent, and not polluted by oils, cleaning agents, powders or other substances.


For the brand new concrete substrates, the seasoned time must be respected. Choose the most convenient mechanical preparation: abrasion or grinding.

Application

1. Apply by roller, a layer of **PAVIWATER** diluted with 20% of water, for a consumption of around 0,130 kg/m² of product A+B.
2. Apply a second layer of **PAVIWATER**, diluted with 10% of water, for a consumption of around 0,130 kg/m² of product A+B.

PAVIWATER can also be mixed with inert granulates in order to obtain an anti-slip surface.

The final thickness is around 100 micron.

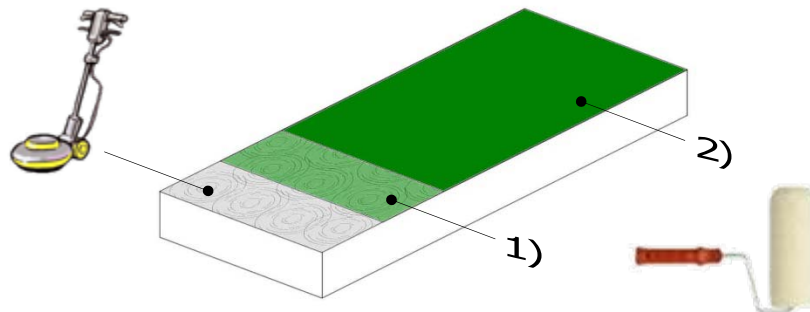

Warnings

In case you have to do the painting on a surface already painted with resin, both layers of PAVIWATER will have to be diluted with 10% of water.

If the base is particularly absorbing or dusty, apply by roller as a layer of PAVIWATER diluted at 50% in water, and then execute the above cycle.

Products

PAVIWATER A+B: waterborne epoxy coating

